

SView

PTZ Camera System

6 Distinct Model Offerings



All Aluminum Construction

The Videolarm pan/tilt mechanism is built entirely of aluminum, including all the gears.



Complete, all-in-one PTZ Video Monitoring System

Videolarm's SView is a highly sophisticated PTZ camera system, available in either IP or Analog format. Designed for outdoor use, consisting of metal gearing and a durable pan/tilt, the SView system features an auto focus, hi-res, true day/night camera, 230x zoom (23x optical and 10x digital), two adjustable privacy zones and 64 presets. Backed by an Industry Leading 5 Year Warranty, the SView system is available in 6 distinguishing enclosures.

- Heavy-duty construction including metal gearing and a durable pan / tilt
- IP or Analog models available
- Auto focus, high-res true day/night camera (23x optical and 10x digital zoom)
- 360° continuous rotation
- Auto protocol and baud-rate selection
- Proportional zoom / pan and zoom / tilt
- 64 presets and 3 auto-tours (sequential and random)
- Two adjustable privacy zones
- Camera solutions for all applications - 6 distinct model types
- Industry Leading 5 Year Warranty

SView 6 Distinct Model Offerings

To better address the needs of your specific monitoring application's requirements, Videolarm offers 6 distinguishing SView model enclosures. Simply select the housing of your choice, based on your environment. It's that easy!

Outdoor Surveillance



FDW7CN-9
FusionDome: Standard 7" dome available in outdoor or indoor models. Pendant mount or wall mount available.



PFD7CN-9
Pressurized FusionDome: IP67 rating, fully pressurized camera system with heater/blower.

Severe & Volatile Environments

RHW7CN-9

Vandal-Resistant Dome: Available with a pendant or wall mount with heater / blower.



RM7TN-9
Recessed Ceiling Dome: Outdoor or indoor models; extends only 3.5" below ceiling.




SM75CN-9
Vandal Resistant Surface Mount Dome: IP66 Rating, capable of mounting either facing down or towards the sky.

Office Environments

MR5TN-9

Recessed Ceiling Dome: Extends only 3 1/2" below ceiling.

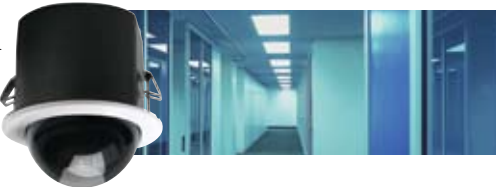

Tinted and Clear Domes available for all models. Change: "C" - Clear or "T" - Tinted. All SView Enclosures available in Analog models. Replace: "N-9" IP or "S-9" Analog.

Optional Components and Accessories:

EOC1N

High-Speed Ethernet over Coax - converting analog video (co-ax) into high-speed Ethernet



IR200-36

One Model for all Applications! 850nm adjustable IR illuminator, 30°, 45°, or 60° angle, 30-200m distance.



WM30G

Aluminum parapet mount bracket, includes 1 1/2" NPT


PRM30G

WM30G with 20" extension



CA15

Ceiling mount adapter, w/ junction box & 1 1/2" NPT

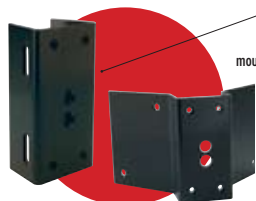

APM3

Aluminum pole mount bracket with female inserts

ACA2

Aluminum corner mount bracket with female inserts



WM20G

Aluminum gooseneck wall bracket, includes 1 1/2" NPT

Video Specifications

Resolutions: Full D1 (4SIF): NTSC=720x480
 VGA, SIF, QVGA, QSIF, QQVGA

Camera Specifications (Analog & IP)

Lens: 23x optical, 10x digital

Minimum illumination: Color 3 lux @ 1/60s, .2 lux @ 1/4s
 B&W: 0.02 lux (1/4s, IR cut fi lter removed)

Resolution: Approx. 360,000 pixels (470 x 400)

Performance: Auto Focus, IRIS Control

Network Specifications (IP Only)

Network Interface: 10/100 Base-T Ethernet

Image Compression: MPEG-4 Simple Profile (SP);
 JPEG; MJPEG

Protocols: TCP(UDP)/IP, ICMP, HTTP, TFTP, FTP, Telnet, SMTP, DHCP, NTP, DNS, DDNS, RTSP, RTP/TCP(UDP)

Mechanical Specifications PAN/TILT

Pan Movement: 360° Continuous pan rotation

Manual Pan/Tilt Speeds: 0.5°-80°/sec manual operation

Preset Pan/Tilt Speeds: 120°/sec

Positioning: +/- .05 degree

Construction: Aluminum


Motors: Stepper motors

Gearing: Belt-driven, 1/4" wide

Bearings: Precision ball bearings, permanently lubricated bushings

For detailed specifications on each SView model, please contact your Videolarm representative or visit www.videolarm.com

SView Model Number System

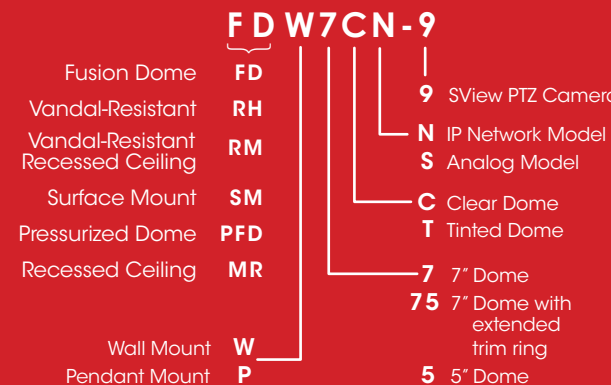

For full product specs, go to www.videolarm.com and use the search engine to navigate to a specific product page.